


# D-sub interfaces

on MPS 80 base element



45233 A/2

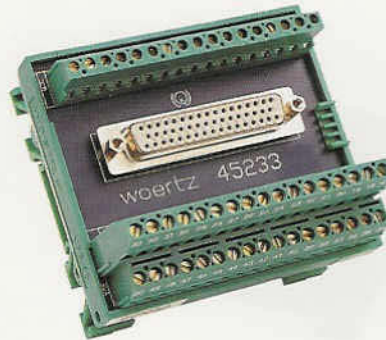


45121 A/1



## Modules with sockets

## Modules with pins


- D-subminiature plugs available with pins or sockets
- With 2 M3 taped sockets for fixing the connector
- As standard the D-subminiature plug has a metal collar as protection against HF interference
- High mechanical security: the connector strip is screwed to the printed circuit board



With sockets

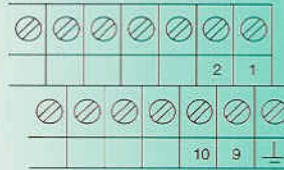

With pins

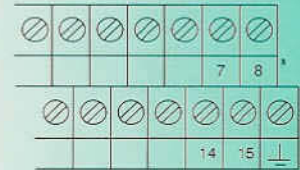

## Technical data

Nominal cross-section of the connecting terminals  
 Rated voltage  
 Rated current load  
 Operating temperature

2.5 mm<sup>2</sup> (AWG 24-14)  
 125 V AC  
 1.5 A  
 - 20°C to + 40 °C

2.5 mm<sup>2</sup> (AWG 24-14)  
 125 V AC  
 1.5 A  
 - 20°C to + 40°C

## Dimensions L x B x H

## Poles

40 x 83 x 58	9
60 x 83 x 58	15
80 x 83 x 58	25
110 x 83 x 58	37
95 x 83 x 58	50

45120 C/2
45121 A/2
45122 A/2
45123 A/2
45233 A/2

45120 C/1
45121 A/1
45122 A/1
45123 A/1
45233 A/1