







DEGSON ELECTRONICS CO., LTD.

Product Specification




PC 2.5

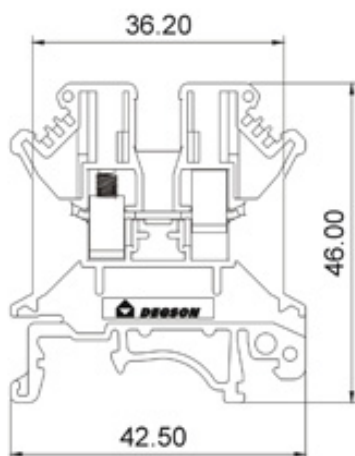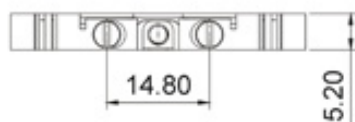

Capability		
Approval	UL	IEC
Standard	UL	IEC
Rated Voltage	600V	800V
Rated Current	20A	24A
Wire size	24-12AWG	0.2-2.5mm ²
T/W/End plate	5.2/42.5/1.6mm	
Height _{mm} (NS35:7.5/NS35:15/NS32)	42/54.5/52mm	
Rated Surge Voltage/Contamination Class	8KV/3	
Stripping Length	7 mm	
Screw Thread/Tightening Torque	M3/0.5N.m/4.5Lb-in	
Internal Cylindrical Gage	A3	
Insulating Material/Inflammability Class	PAV-0	

Specification	Model	Pieces
(1) Terminal Block	PC2.5	50
(2) End Cover	D-PC1.5	50
(3) Fixed Bridge	2-P 3-P 5-P 10-P	10 10 10 10
(4) Step Bracket		
(5) Insertion Bridge	2-P 3-P 10-P	10 10 10
(6) Isolator Bridge Bar, 10 P		
(7) Bridge Bar Isolator		
(8) Switching Bridge		
(9) Separating Plate	TS-K	50
(10) Separating Plate, Width:1.5mm	ATP-PC	50
(11) Test Plug Socket	PSB 3/10/4	100
(12) Test Plug Socket, Insulated	PSBJ 3/13/4	100
(13) Zack Strip	ZB6	

HOW TO ORDER:

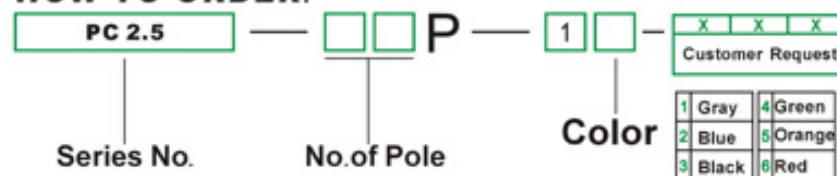

 	 DEGSON ELECTRONICS CO., LTD. NAME PC 2.5
------	--