






DEGSON ELECTRONICS CO., LTD.

Product Specification




PC4

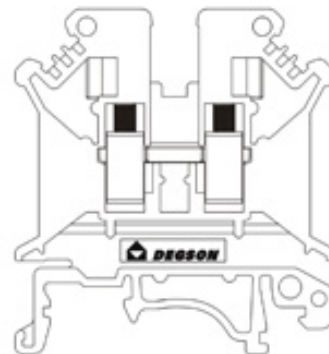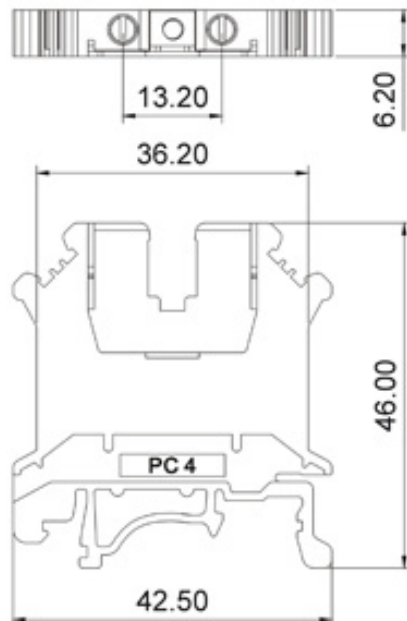

Capability		
Approval	UL	IEC
Standard	UL	IEC
Rated Voltage	600V	800V
Rated Current	30A	32A
Wire size	24-10AWG	0.2-4mm ²
T/W/End plate	6.2/42.5/1.6mm	
Height _{mm} (NS35:7.5/NS35:15/NS32)	47/54.5/52mm	
Rated Surge Voltage/Contamination Class	8KV/3	
Stripping Length	8mm	
Screw Thread/Tightening Torque	M3/0.5N.m/4.5Lb-in	
Internal Cylindrical Gage	A4	
Insulating Material/Inflammability Class	PAV-0	

Specification	Model	Pieces
(1) Terminal Block	PC4	50
(2) End Cover	D-PC2.5	50
(3) Fixed Bridge	FBI 2-6 FBI 3-6 FBI 5-6 FBI 10-6	10 10 10 10
(4) Step Bracket		
(5) Insertion Bridge	EB 2-6 EB 3-6 EB 10-6	100 100 10
(6) Isolator Bridge Bar, 10 P	ISSBI 10-6	10
(7) Bridge Bar Isolator	IS-K4	100
(8) Switching Bridge	USBR 2-7	1
(9) Separating Plate	TS-K	50
(10) Separating Plate, Width:1.5mm	ATP-PC	50
(11) Test Plug Socket	PSB 3/10/4	100
(12) Test Plug Socket, Insulated	PSBJ 3/13/4	100
(13) Zack Strip	ZB6	

HOW TO ORDER:

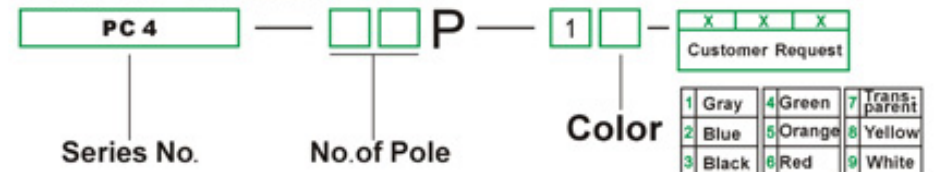

		DEGSON ELECTRONICS CO., LTD.
NAME		PC 4