


New From Comat AG
 Available for Woertz-USA

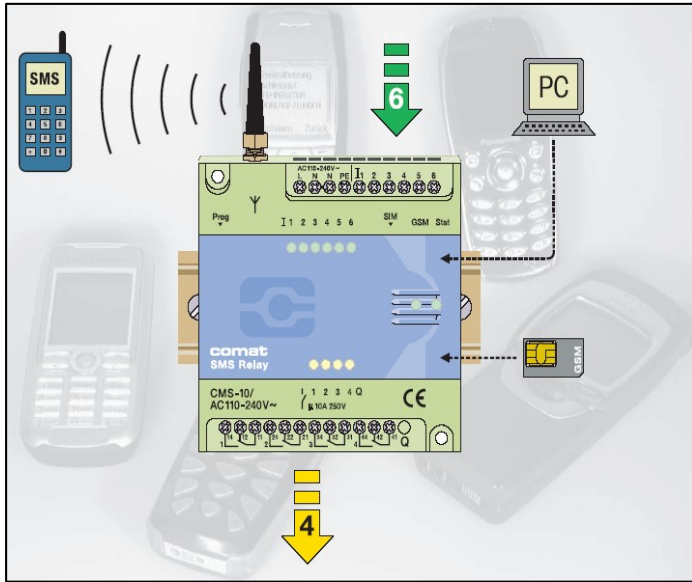

Comat SMS Relay

The new Comat SMS relay offers:


- Monitoring of all inputs and outputs with SMS messaging
- Remote control of outputs by SMS
- Sequential alert message to 5 different subscribers
- Easy configuration with PC and <<Fast SMS Set>>-up configuration software
- Power failure notification and status change messages by SMS messaging
- User defined message text

Technical Data's

Operating voltage	AC 110-240V~ 50/60Hz	DC 12-48V= ▽ max. 10%
Power consumption	8VA/6W	6W
Switching capacity	4x 10 A 250V	
Temperature range	T _u : -25...+55° C Rel. humidity: 5...95% (non condensing) Protection IP 20	
Inputs	6x digital trigger level 85V~	6x digital trigger level 9,5V=
Outputs	4x CO contacts	
Provider (Phone/Network)	User selectable (dependent on SIM card)	

Type	Description	Price
Kit consisting of: A base unit with small antenna, programming cable, antenna with magnetic pod and 2.5mm cable, CD with <<Fast SMS Set>> - up programming software and operation manual		
CMS-10KIT/AC110-240V	Installation kit complete (SMS Relay AC 110-240V)	\$936.48
CMS-10KIT/DC12-48V	Installation kit complete (SMS Relay DC12-48V)	\$936.48

Accessories can be ordered individually. Please call



Antenna: with magnetic pod & 2.5mm antenna cable.
Type: CMS-ANT-MAG/2.5m

6/27/2006

