


Woertz –USA
 151 Discovery Drive #111
 Colmar, PA 18915
 Tel: (215) 997-8855
 Fax: (800) 522-3868
 Internet: www.woertz-usa.com
 Email: woertzusa@verizon.net


Features:

- Woertz-USA's new PLC connector interface module saves time, money and panel space
- Three wire interface with + and – common and fuse for each I/O
- Can be used with most PLC's
- 8 and 16 channel modules available
- Terminals are screw clamp connection
- Uses Subminiature fuses (fuses sold separately)

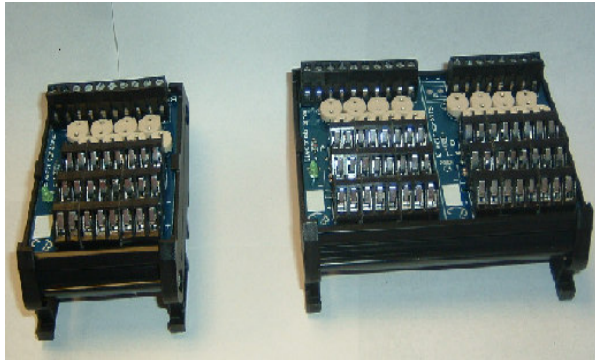


Fuses sold Separately

Fuse specs: Little fuse 373 series TR5
Subminiature fuse
 Dimensions (mm)



Short Leads (L=4.3 mm)

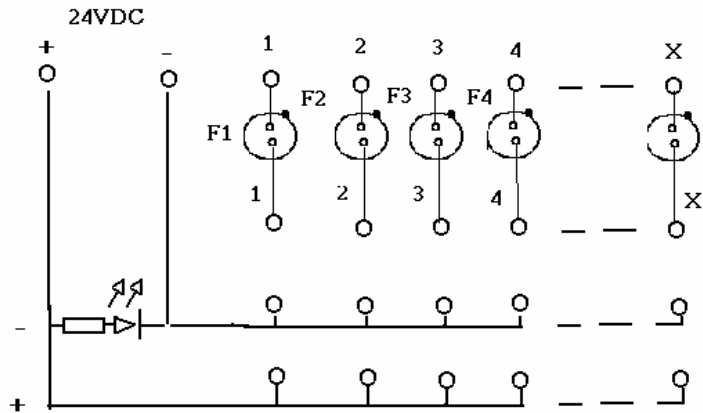

Technical data

Output

Max. AC Voltage 24VDC
 Max. Current 5 amps

General data

Operating temperature range -20 °F to +86 °F

Wire cross section 2.5 mm² (AWG 24-14)

Order No

8 Channel Module

Size L x B x H (from rail)

EB-IM1-PR1-8F
 (93 mm x 58 mm x 44mm)

16 Channel Module

Size L x B x H (from rail)

EB-IM1-PR1-16F
 (93 mm x 114 mm x 44mm)

